


-/240/- TPS Firesafe® Integrity only fire curtain

Automatic descending fabric fire curtain which can be activated by stand alone fire/smoke sensors, or wired to the building wide alarm system.

Highly suited for large openings that need to remain clear during normal operation, but require an integrity only fire barrier during a fire scenario, such as shopping centres, factories, and public buildings.

Features

- ◆ -/240/- FRL to AS1530.4
- ◆ Single or multibarrel system
- ◆ Single barrel system up to 7m wide
- ◆ Multibarrel system up to >30m wide
- ◆ Max opening height of 8m
- ◆ Gravity fail safe included
- ◆ 24V control panel included
- ◆ Surface mounted or In-opening options
- ◆ Optional extras available included
 - ◆ Over-ride switches for escape. Pressing the switch rolls the curtain up, allowing people to escape. Once the switch has been released, the curtain will return to the floor.
 - ◆ Audio Visual alarms. The beacon will flash and the sounder will activate while the curtain descends.
 - ◆ Low battery alarm. Audio/visual warning when battery back up drops to 80%.
 - ◆ Beam sensor. Can be programmed to either stop or retract the curtain in the case of an obstacle.
 - ◆ Delayed (stage) drop systems. These will allow a temporary means of escape, and a gradual smoke containment system as the curtain drops in stages.

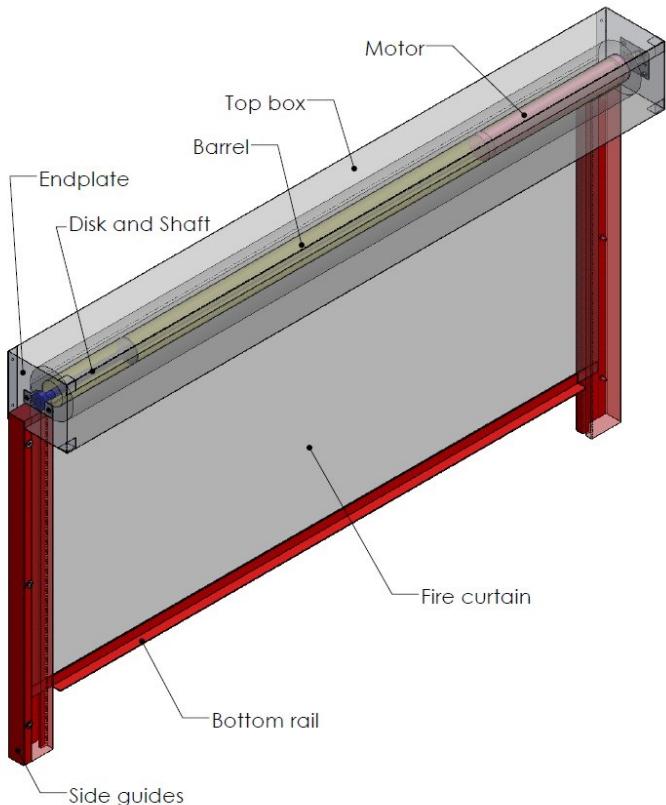

TPS Firesafe® fire curtains are manufactured by UK company "Smoke and Fire Curtains Ltd.". TPS is the authorised Australian distributor for 'Smoke and Fire Curtains Ltd, Unit A, Troon Way Business Centre, Humberstone Lane, Leicester, LE49HA. Firesafe® is a registered trademark of 'Smoke and Fire Curtains Ltd'.

To Specify

"Fire Curtain to be tested and certified -/240/- TPS Firesafe ® integrity only fire curtain, with optional extras as follows, etc. Curtain available from Technical Protection Systems' approved distribution network.
www.technicalprotection.com.au".